


Mounting Elements

- L, Z, and V-type anti-vibration hangers:

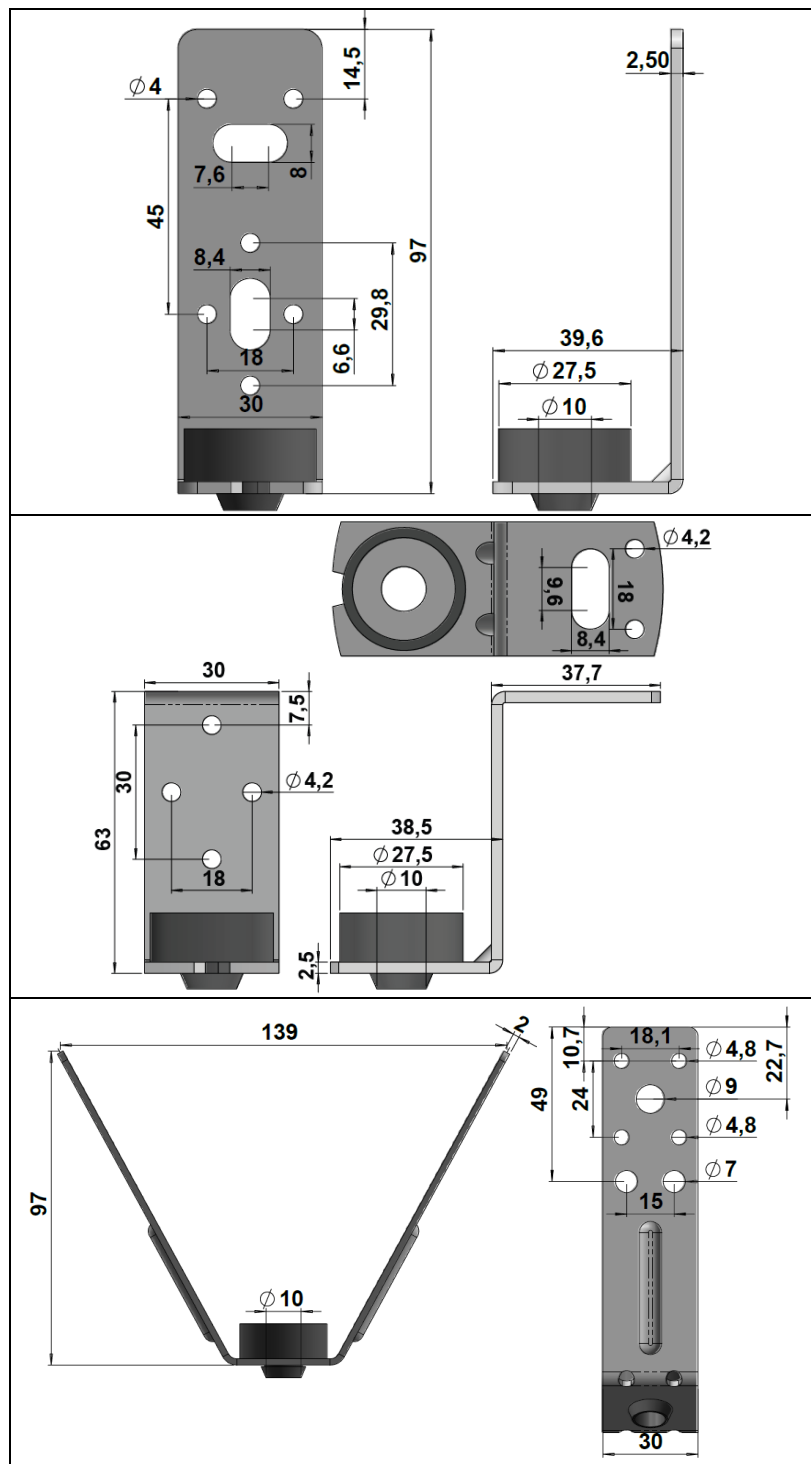


Suitable for suspending rectangular and circular ducts using M8 or M10 threaded rods

- Attached to the duct using self-tapping screws
- Manufactured from galvanized steel
- Equipped with a rubber damper to reduce the transmission of duct system vibrations to the building structures
- Sold individually (per piece)

We reserve the right to adjust the information without prior notice. last updated 2025-10

LINMAT, UAB, j.m. kodas 304042487, PVM k. LT100009501719, buveinės adresas Ateities g. 10, LT- 08303 Vilnius, tel.: 0 617 18240, info@linmat.lt, A/S LT107044060008025504, AB SEB bankas, CBVILT2X

- **Flange corners H:**

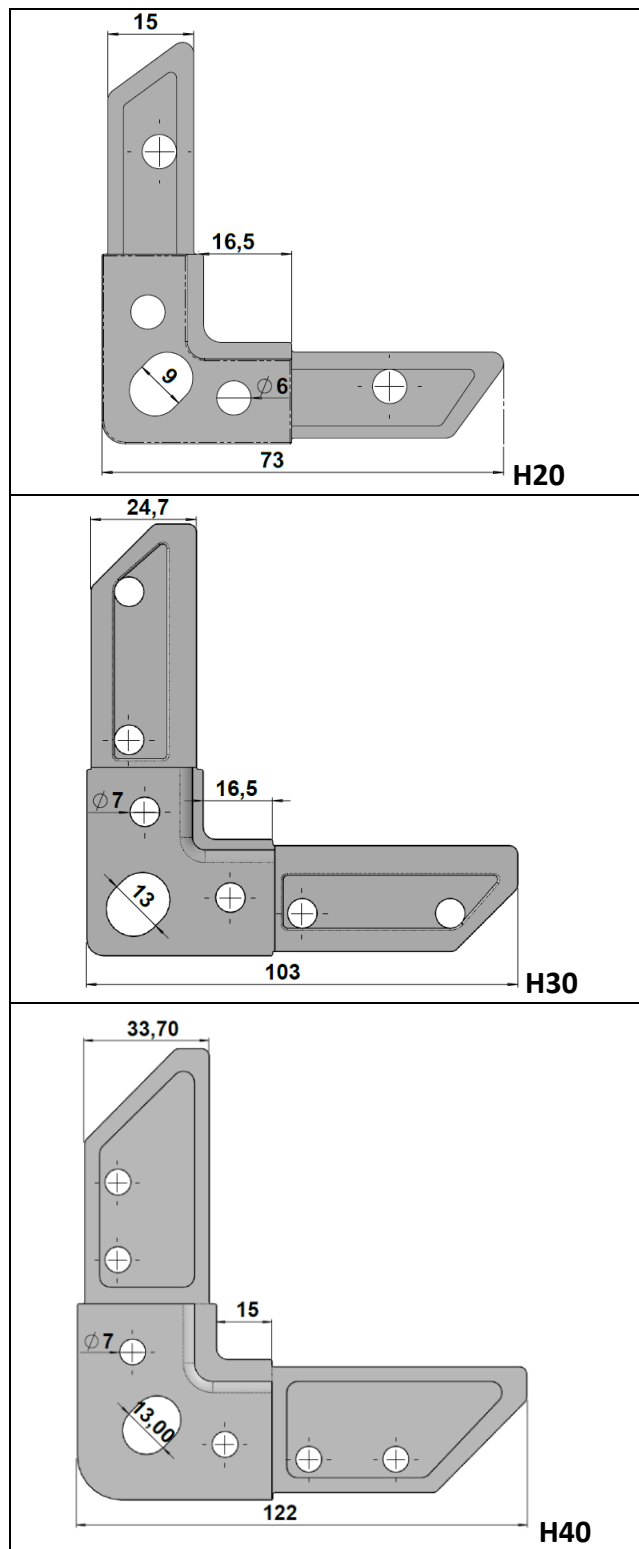


Designed for assembling rectangular duct flanges when shortening ducts

- Manufactured from galvanized steel
- Sold individually (per piece)

We reserve the right to adjust the information without prior notice. last updated 2025-10

LINMAT, UAB, įm. kodas 304042487, PVM k. LT100009501719, buveinės adresas Ateities g. 10, LT- 08303 Vilnius, tel.: 0 617 18240, info@linmat.lt, A/S LT107044060008025504, AB SEB bankas, CBVILT2X


- **Flange profile L:**

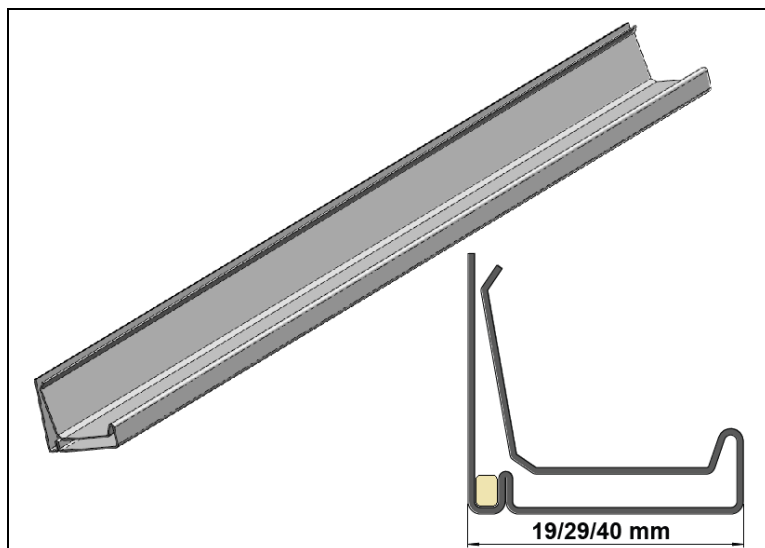

Designed for assembling rectangular duct flanges when shortening ducts

- Manufactured from galvanized steel
- Available widths: L20 – 19 mm, L30 – 29 mm, L40 – 40 mm
- Features an integrated sealing compound inside the profile, hygiene certificate: HK/B/1285/01/2013
- Sold in 5 m lengths; shorter lengths are also available upon request


- **C - connection Profile:**

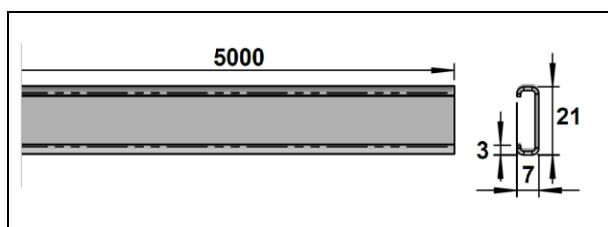

Designed for securing rectangular duct flange joints

- Manufactured from 1.2 mm galvanized sheet steel
- Sold in 5 m lengths; shorter lengths are also available upon request

- **Ventilation Duct Clips CLAMP:**

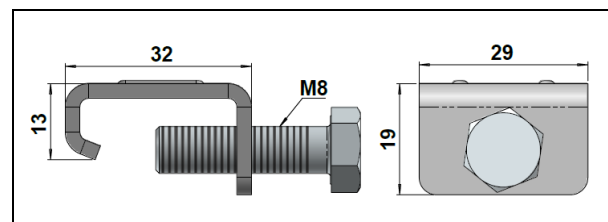

Designed for securing rectangular duct flange joints

- Manufactured from 3.0 mm galvanized steel
- Sold individually (per piece)

- **Sealing gasket GAS:**



Designed for sealing rectangular duct flange joints

- Tested in accordance with EN ISO 846 and suitable for use in ventilation systems according to VDI 6022
- Manufactured from closed-cell polyurethane foam
- Single-sided self-adhesive with the other side laminated
- Dimensions: 12 x 6 mm
- Sold in 10 m rolls

We reserve the right to adjust the information without prior notice. last updated 2025-10

LINMAT, UAB, j.m. kodas 304042487, PVM k. LT100009501719, buveinės adresas Ateities g. 10, LT- 08303 Vilnius, tel.: 0 617 18240, info@linmat.lt, A/S LT107044060008025504, AB SEB bankas, CBVILT2X


- **Perforated Suspension Banding DUH:**



Designed for suspending ventilation system components

- Manufactured from 0.6 mm galvanized sheet steel
- Width: 17 mm
- Sold in 25 m rolls


- **Self-drilling screws SDS:**

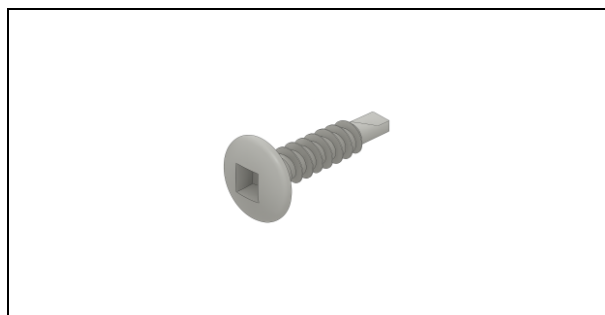

Designed for fastening ventilation system components

- Made of galvanized steel
- Dimensions: 4.2 x 13 mm
- Self-drilling tip (drill point)
- Sold in boxes of 1000 pcs.
- Driver bit included in each package


- **Threaded rods STR:**

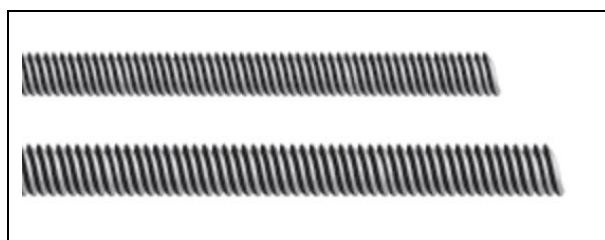

Designed for suspending ventilation system components

- Made of galvanized steel
- M8 and M10 sizes, 2000 mm in length
- Sold individually (per piece)

- **Anchors ANKER:**

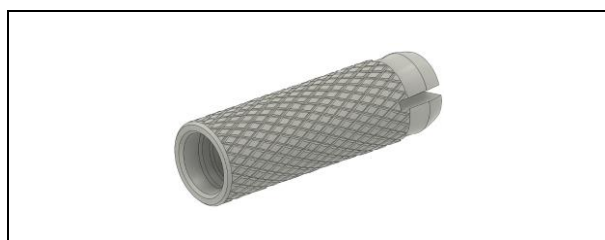


Designed for fixing threaded rods to concrete/masonry ceilings or walls

- Dimensions: M8 x 28, d10 mm
- Manufactured from brass alloy
- Sold individually (per piece)

We reserve the right to adjust the information without prior notice. last updated 2025-10

LINMAT, UAB, įm. kodas 304042487, PVM k. LT100009501719, buveinės adresas Ateities g. 10, LT- 08303 Vilnius, tel.: 0 617 18240, info@linmat.lt, A/S LT107044060008025504, AB SEB bankas, CBVILT2X


- **Support Channels U:**

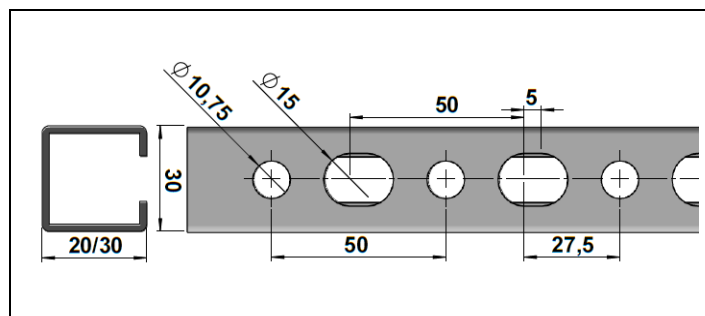

Designed for suspending rectangular and circular ducts

- Made of galvanized steel
- 30x20 mm with a wall thickness of 1.5 mm
- 30x30 mm with a wall thickness of 1.75 mm
- Sold in 5 m lengths; shorter lengths are also available upon request


- **Bolts, nuts, and washers M8:**

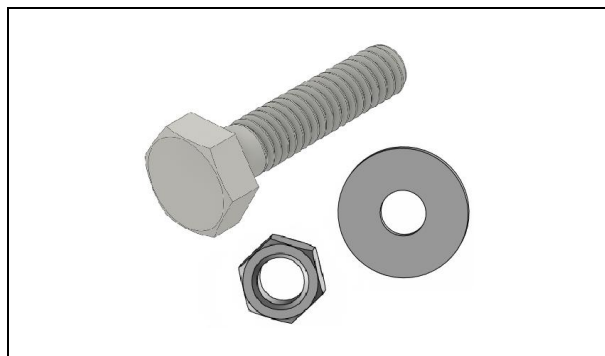

Designed for securing rectangular duct flange joints

- Made of galvanized steel
- Bolts: M8x30mm DIN 933
- Nuts: M8 DIN 934-08
- Washers: M8 DIN 9021
- Sold individually or in packs of 100 pcs.

- **Metal Band and Fasteners CMB/CMC:**

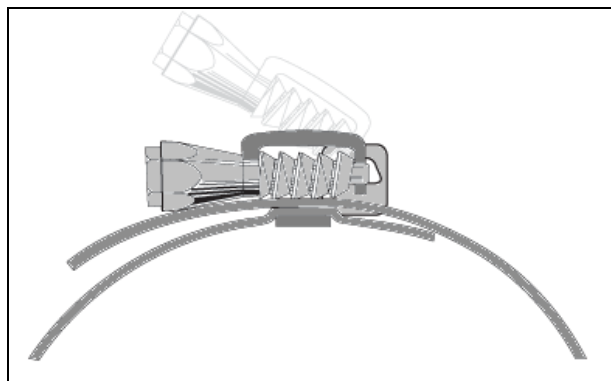


Designed for clamping flexible ducts and corrugated hoses onto metal ducts or fittings

- Manufactured from 9 mm stainless steel band
- CMB bands are sold in a 30 m plastic cassette, CMC fasteners are sold in boxes of 50 pcs.

We reserve the right to adjust the information without prior notice. last updated 2025-10

LINMAT, UAB, j.m. kodas 304042487, PVM k. LT100009501719, buveinės adresas Ateities g. 10, LT- 08303 Vilnius, tel.: 0 617 18240, info@linmat.lt, A/S LT107044060008025504, AB SEB bankas, CBVILT2X

- **Sealing Mastic:**

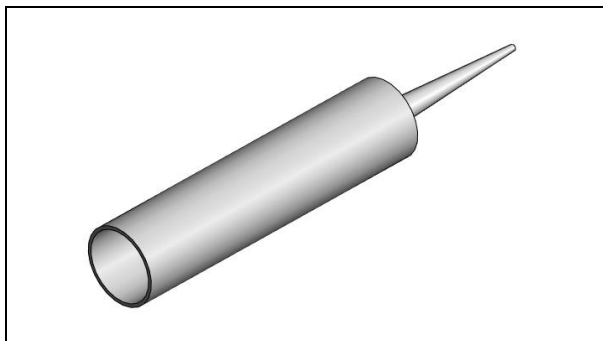

Neutral cure sealant suitable for metal and most other surfaces.

- Color: grey
- Sold in 280 ml cartridges